


Connecting and Configuring Your Brivo ACS100


Step
1



Red: 12V Out (Power)
Blue: REX
Yellow: Door Contact
Brown: Lock Power
Black: GND


Connect door wiring
to your hardware

Step
2



Plug the ACS100 into your network
via PoE; allow it to boot


Step
3

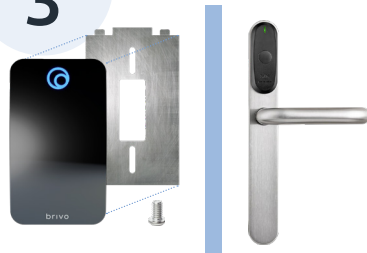

Mount the ACS100 to junction box or wall
using included screws and hardware

The product is designated for indoor and outdoor use. Follow safe handling and installation precautions at all times.

Step
4

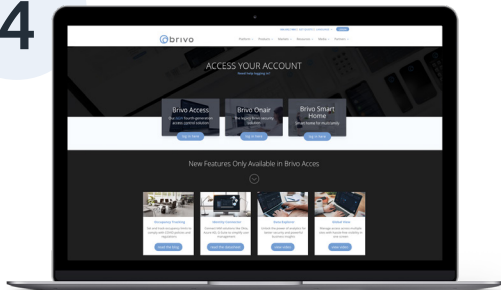

Configure your ACS100 online at
brivo.com/login

Access the complete
installation guide at:
brivo.com/acs100
or the QR code below



Need More Help?
Contact Brivo Support with questions
or if you need assistance
866-274-8648 Ext. 2

